

www.yourflooring.net

HOMOGENEOUS RESILIENT FLOORING

Comply with ISO14001, Using European advanced production technology, Insure the raw materials and production meet European standard.



ELASTIC FLOORING
PRODUCTION BASE

HEALTHY AND ANTI-MICROBIAL

It can effectively inhibit the growth of MASA. Comply with the limit testing of national harmful substances (GB18586), the product doesn't have any harmful substances for human.

Enjoy / Natural / Noble




Abrasion Resistant
Stain Resistant
No Wax Needed


Renderings are for reference only. Please refer to the actual product.




With the *natural* together

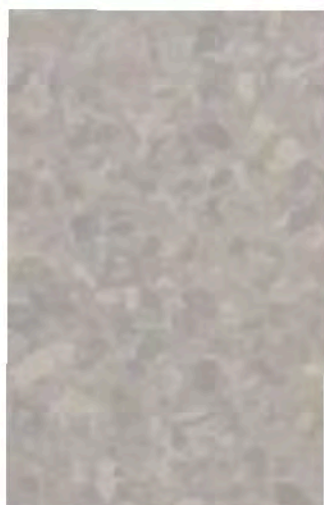

HP3001

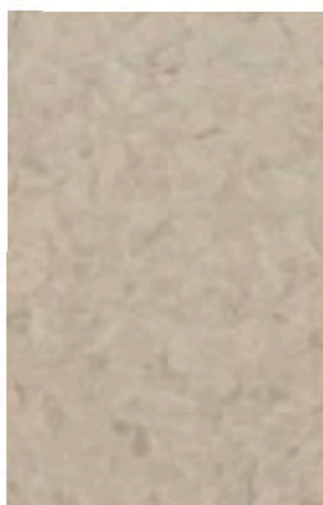


HP3031

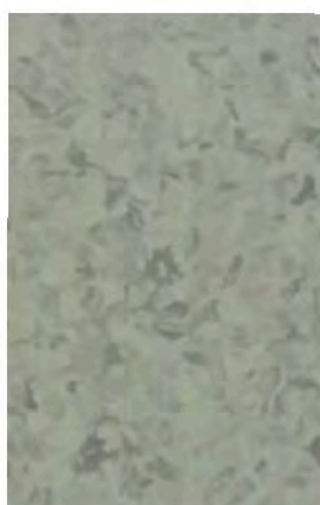


HP3005




HP3027

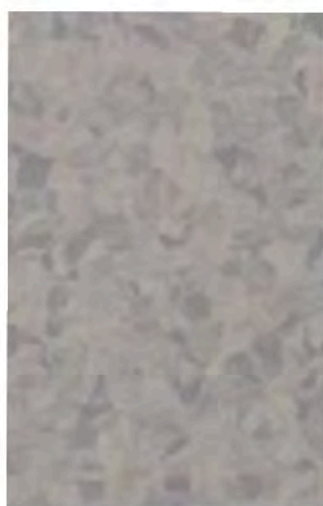


HP3006

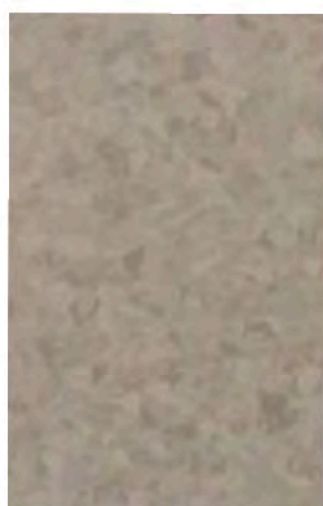


HP3007

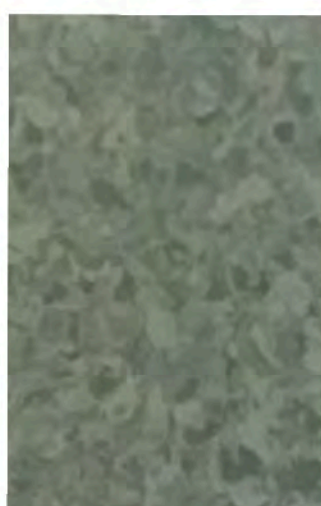

HP3010

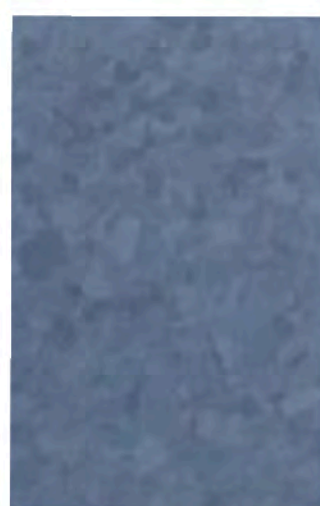


HP3022

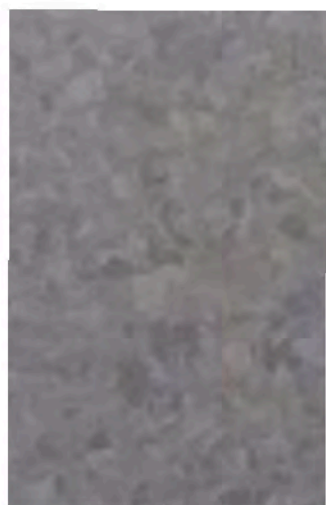


HP3029



HP3012

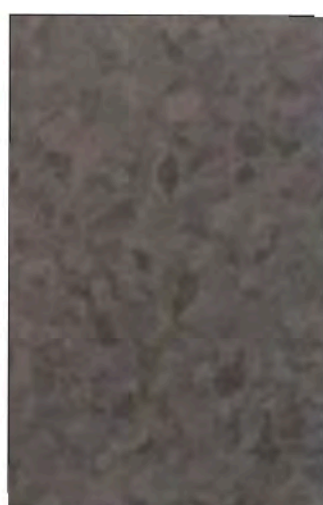


HP3013

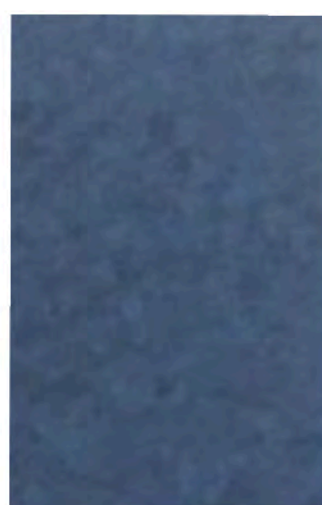


HP3018


Size : 2.0mm(H) x 2.0m(W) x 20m(L)

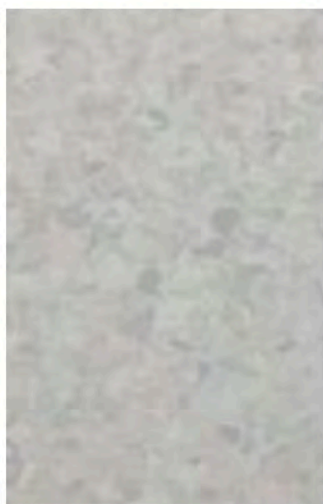


HP3002

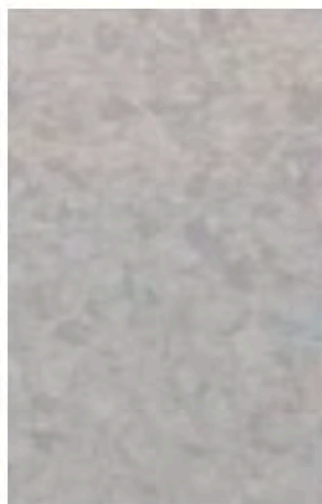

HP3026

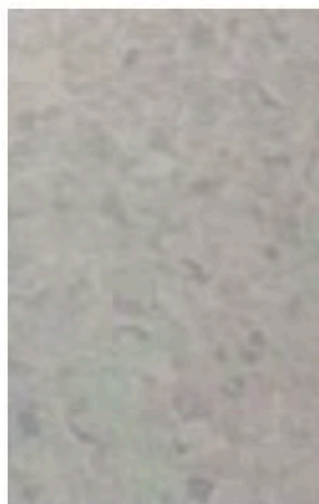


HP3008

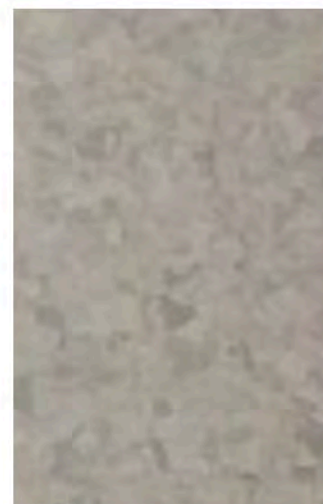


HP3003




HP3016

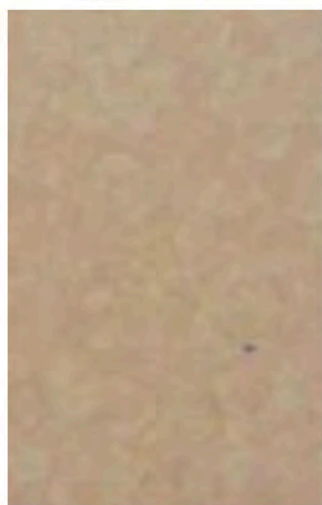

HP3023

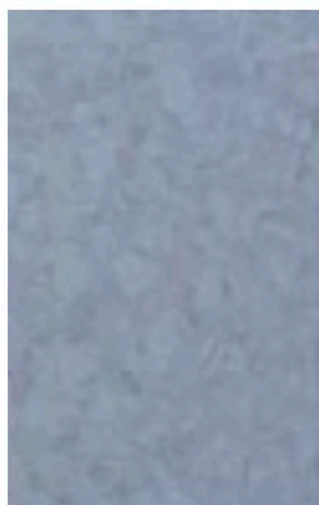


HP3032




Colors are for reference only.
Please refer to the actual product.



HP3017

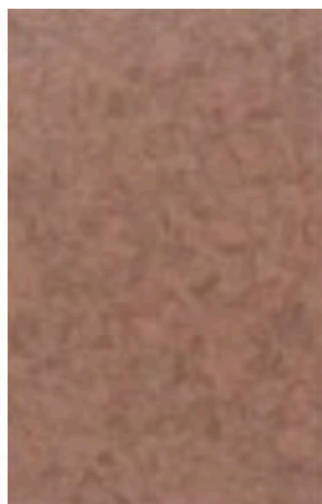

HP3030

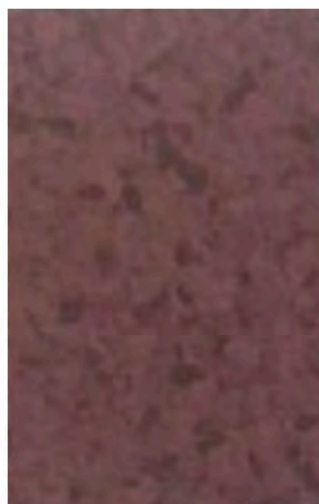

HP3019



HP3020

* 产品颜色仅供参考, 请以实物为准

Brand	J X	J X
Production Standard	EN649	Homogeneous vinyl roll
Application Class	EN685	23/34/43
		PUR
Total Weight	EN430	2850 g/m²
Total Thickness	EN428	2.0 mm
Sheet Width	EN426	2 m
Sheet Length	EN426	20 m
Wear Group	EN660	Class T
Residual Indentation	EN433	0.03 mm
Dimensional Stability	EN434	<=0.05%
Resistance to Chemicals	EN423	Excellent
Reaction to Fire	EN13501-1	B-s1
Electrical Behaviour	EN1815	<=2kV
Impact Sound Reduction	ENISO717/2 ^Δ L _w	~ +4 dB
Color Fastness to Light	EN ISO105-B02	>=6
Mold Resistance	DIN EN ISO 846-A/C	No bacterial growth
Slip Resistance	DIN 51130	R9
Hazardous Substances Testing	GB 18586-2001	Pass

www.yourflooring.net

Contact us for more colors!

